


GASKETS



OVAL RING TYPE JOINT DIMENSIONS – ASME B16.20

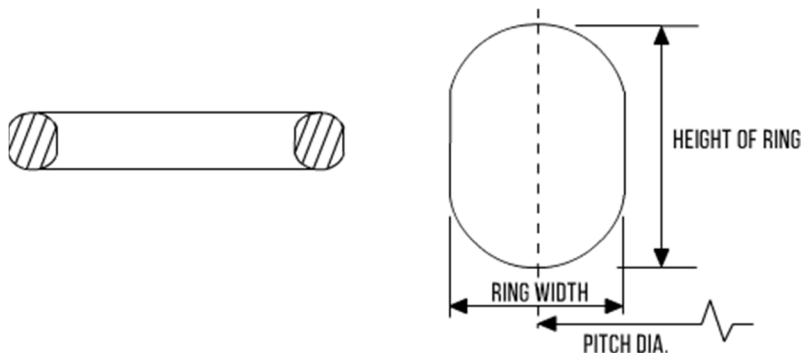

RING No.	SIZE	CLASS	PITCH	WIDTH	HEIGHT
R-11	1/2"	300, 600	1.344	0.250	0.440
R-12	1/2"	900, 1500	1.563	0.313	0.560
R-13	3/4"	300, 600	1.688	0.313	0.560
R-13	1/2"	2500	1.688	0.313	0.560
R-14	3/4"	900, 1500	1.750	0.313	0.560
R-15	1"	150	1.875	0.313	0.560
R-16	1"	300, 600, 900, 1500	2.000	0.313	0.560
R-16	3/4"	2500	2.000	0.313	0.560
R-17	1.1/4"	150	2.250	0.313	0.560
R-18	1.1/4"	300, 600, 900, 1500	2.375	0.313	0.560
R-18	1"	2500	2.375	0.313	0.560
R-19	1.1/2"	150	2.563	0.313	0.560
R-20	1.1/2"	300, 600, 900, 1500	2.688	0.313	0.560
R-21	1.1/4"	2500	2.844	0.438	0.690
R-22	2"	150	3.250	0.313	0.560
R-23	2"	300, 600	3.250	0.438	0.690
R-23	1.1/2"	2500	3.250	0.438	0.690
R-24	2"	900, 1500	3.750	0.438	0.690
R-25	2.1/2"	150	4.000	0.313	0.560
R-26	2.1/2"	300, 600	4.000	0.438	0.690
R-26	2"	2500	4.000	0.438	0.690
R-27	2.1/2"	900, 1500	4.250	0.438	0.690
R-28	2.1/2"	2500	4.375	0.500	0.750
R-29	3"	150	4.500	0.313	0.560
R-30	3" (1)	300	4.625	0.438	0.690
R-31	3"	300, 600, 900	4.875	0.438	0.690
R-32	3"	2500	5.000	0.500	0.750
R-33	3.1/2"	150	5.188	0.313	0.560
R-34	3.1/2"	300, 600	5.188	0.438	0.690
R-35	3"	1500	5.375	0.438	0.690
R-36	4"	150	5.875	0.313	0.560
R-37	4"	300, 600, 900	5.875	0.438	0.690

GASKETS



R-38	4"	2500	6.188	0.625	0.880
R-39	4"	1500	6.375	0.438	0.690
R-40	5"	150	6.750	0.313	0.560
R-41	5"	300, 600, 900	7.125	0.438	0.690
R-42	5"	2500	7.500	0.750	0.750
R-43	6"	150	7.625	0.313	0.560
R-44	5"	1500	7.625	0.438	0.690
R-45	6"	300, 600, 900	8.313	0.438	0.690
R-46	6"	1500	8.313	0.500	0.750
R-47	6"	2500	9.000	0.750	1.000
R-48	8"	150	9.750	0.313	0.560
R-49	8"	300, 600, 900	10.625	0.438	0.690
R-50	8"	1500	10.625	0.625	0.880
R-51	8"	2500	11.000	0.875	1.130
R-52	10"	150	12.000	0.313	0.560
R-53	10"	300, 600, 900	12.750	0.438	0.690
R-54	10"	1500	12.750	0.625	0.880
R-55	10"	2500	13.500	1.125	1.440
R-56	12"	1500	15.000	0.313	0.560
R-57	12"	300, 600, 900	15.000	0.438	0.690
R-58	12"	1500	15.000	0.875	1.130
R-59	14"	150	15.625	0.313	0.560
R-60	12"	2500	16.000	1.250	1.560
R-61	14"	300, 600	16.500	0.438	0.690
R-62	14"	900	16.500	0.625	0.880
R-63	14"	1500	16.500	1.000	1.310
R-64	16"	150	17.875	0.313	0.560
R-65	16"	300, 600	18.500	0.438	0.690
R-66	16"	900	18.500	0.625	0.880
R-67	16"	1500	18.500	1.125	1.440
R-68	18"	150	20.375	0.313	0.560
R-69	18"	300, 600	21.000	0.438	0.690
R-70	18"	900	21.000	0.750	1.000
R-71	18"	1500	21.000	1.125	1.440
R-72	20"	150	22.000	0.313	0.560
R-73	20"	300, 600	23.000	0.500	0.750
R-74	20"	900	23.000	0.750	1.000
R-75	20"	1500	23.000	1.250	1.560
R-76	24"	150	26.500	0.313	0.560
R-77	24"	300, 600	27.250	0.625	0.880
R-78	24"	900	27.250	1.000	1.131
R-79	24"	1500	27.250	1.375	1.750

- (1) R-30 for lapped joints only
- All dimensions in inches